

Artistic Space Beyond Display

Dual-view Curved Tiling OLED Signage 65EE5PC




With cutting-edge OLED technology, LG Electronics introduces an innovative Dual-view Curved Tiling OLED Signage that has perfect picture quality and revolutionary pencil-thin design, adding artistic value to its display functionality.



Why OLED Technology


Perfect Black

Limitless contrast and deepest black
Self-lighting pixels switch off completely to reproduce black with no light bleed. Absolute black offers infinite contrast.

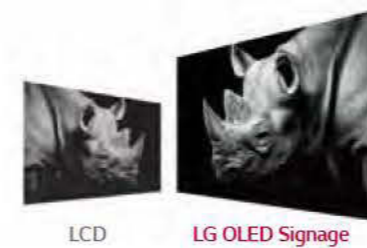

Perfect Color

Accurate & stable color reproduction
Self-lighting pixels bring colors to life with superb accuracy.

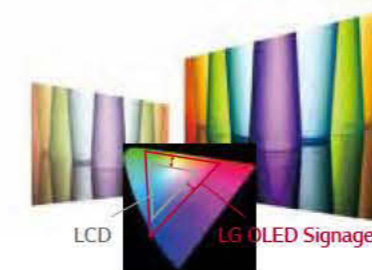

Perfect Viewing Screen

Wide viewing angle
LG OLED Signage delivers awe-inspiring picture quality across the entire screen, even from wide viewing angles.



Crisp, Clear Motion

Faster response time
LG OLED Signage provides 5,000 times faster motion picture response time, for perfectly clear images without blurring.



Perfect Design

Slim and light
With just two layers, the LG OLED Signage Display is unbelievably thin.



* Edge depth

Download LG Commercial Display Mobile App



Learn more www.lg.com/b2b or www.lgcommercial.com

YouTube [youtube.com/c/LGCommercialDisplay](https://www.youtube.com/c/LGCommercialDisplay)

LG may make changes to specifications and product descriptions without notice.
Copyright © 2016 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.



Artistic Space Beyond Display

Dual-view Curved Tiling OLED Signage 65EE5PC



Screen Size
65"

65EE5PC

- Brightness : 450 cd/m²
- Bezel : (Front) 15 mm (U), 26 mm (B), 13.2 mm (L/R)
- Depth : 8.54 mm (Module)
- Interface : HDMI / RS232C / RJ45 / IR In
- SuperSign W/Lite/C/N



Key Features

Two Displays for Multi-Use

Two-way media experience and space saving thanks to innovative slim depth.




Modular Design

Modular design allows different layouts between 1 x 2 and 1 x 4 with the same design identity.

An example table for placing order by each model

Set	Module		External Cover		
	65MODLC	65EE5PC	65CVR4C	65CVR3C	65CVR2C
1 x 4	4ea	4ea	1ea	-	-
1 x 3	3ea	3ea	-	1ea	-
1 x 2	2ea	2ea	-	-	1ea



1 x 2



1 x 3




1 x 4

* Accessories include stand cover, top/side/bottom deco, cables, IR receiver, etc.

PC-less Playback

High performance SoC & high internal memory capacity (128 GB) enable perfect UHD-synced playback without the need for media players.

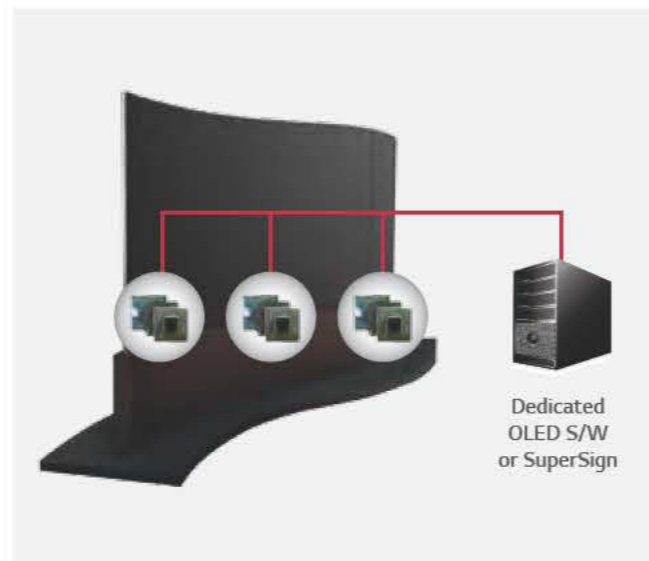

Specifications

	65EE5PC	
PANEL	Screen Size	65"
	Panel Technology	OLED
	Aspect Ratio	16 : 9
	Native Resolution	3,840 x 2,160
	Brightness	140/450 cd/m ² (APL* 100% / 25%) * Average Picture Level
	Contrast Ratio	140,000:1
	Color Gamut	129%
	Viewing Angle (H x V)	120 x 120
	Response Time	1 ms (G to G) (Typ.), 8 ms (MPRT)
	Surface Treatment	Hard coating (2H), Anti-reflection
CONNECTIVITY	Operation Hours	TBD
	Orientation	Portrait
	Input	HDMI (HDCP 2.2, External)
CONNECTIVITY	Output	-
	External Control	RS232C IN, RJ45, IR Receiver
PHYSICAL SPECIFICATION	Bezel Color	Black
	Bezel Width	15, 26, 13.2, 13.2 mm (U, B, L, R Off-bezel)
	Dimension (W x H x D)	(1 x 4 Model) Display: 3,123 x 2,120 x 8.54 mm (Module), 99 mm (Stand Neck)
	Weight	(1 x 4 Model) 380 kg
	Carton Dimensions (W x H x D)	1,038 x 858 x 1,281 mm (65EE5PC, include Pallet) 2,278 x 1,262 x 1,037 mm (65CVR4C, include Pallet)
Packed Weight	TBD	
SPECIAL FEATURES	Temperature Sensor, Cooling FAN, Tile Mode, Source Selection (HDMI, DP), DPM Select, Energy Saving, Motion Eyecare, Internal Memory 128 GB (System 4 GB + Available 124 GB), Firmware update (LAN), HDMI-CEC, Fail over (DP, HDMI, Internal Memory), DP daisy chain	
ENVIRONMENT CONDITIONS	Operation Temperature	0°C to 40°C
	Operation Humidity	10% to 80%
POWER	Power Supply	100-240V~, 50/60Hz
	Power Type	Built-In Power
POWER CONSUMPTION	Typ.	230 W
	DPM	3 W
	Power Off	0.5 W
STANDARD (CERTIFICATION)	Safety	N/A
STANDARD (CERTIFICATION)	EMC	FCC Class "A" / CE / KCC
	ErP / Energy Star	ErP
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	N/A
	External Media Player Attachable	N/A
SOFTWARE COMPATIBILITY	OLED SuperSign	Yes
	SuperSign C	Yes
ACCESSORY	Basic	Remote Controller (2ea batteries included), Power Cord, HDMI Cable, DP Cable 7ea, RS232C Cable 8ea, LAN Cable 9ea, QSG, Manual
	Optional	N/A

* Half Brightness

※ 1+1 means 1 input for 1 each screen